

Energy-time entanglement preservation in plasmon-assisted light transmission

Sylvain Fasel* and Nicolas Gisin, Hugo Zbinden
Group of Applied Physics, University of Geneva
CH-1211 Geneva 4, Switzerland

Daniel Erni, Esteban Moreno, Frank Robin
Communication Photonics Group, ETHZ
8092 Zürich, Switzerland

We report on experimental evidences of the preservation of the energy-time entanglement for extraordinary plasmonic light transmission through sub-wavelength metallic hole arrays, and for long range surface plasmon polaritons. Plasmons are shown to coherently exist at two different times separated by much more than the plasmons lifetime. This kind of entanglement involving light and matter is expected to be useful for future processing and storing of quantum information.

Entanglement is one of the most fundamental aspect of the quantum theory. While it is somewhat counter-intuitive and has no classical counterparts, it can be used to achieve information and communication tasks with much higher efficiencies than otherwise possible classically, and is thus the heart of the quantum information. A particular form of entanglement, the energy-time entanglement involving photons at telecom wavelength is particularly efficient in carrying quantum information over large distances as it has been shown to be specially robust against environmental perturbation [1]. This already leads to applications like quantum cryptography [2] or quantum teleportation [3]. However, entanglement involving distant solid matter is a mandatory but difficult step for useful quantum information processing and storing, and researches are held in that direction [4, 5, 6, 7]. Interaction between energy-time entangled photons at telecom wavelength and quantum states of matter is thus of great interest, both from a fundamental point of view and for its potential future applications.

We investigate the coupling of energy-time entangled photon pairs with surface plasmons (SPs), which are collective excitation wave involving typically 10^{10} free electrons propagating at the surface of conducting matter (usually metal) [8]. To this end, we placed gold films perforated with periodic subwavelength hole array in the path of energy-time entangled photons. Since the holes are subwavelength, this kind of nanostructures impedes the direct photon transmission, but allows the resonant excitation of a SP at the metal interfaces, which reradiates a photon at the back side of the metallic film. The transmittance of this plasmon-mediated phenomenon is orders of magnitude larger than predicted by the standard theory of diffraction by small metallic apertures [9]. This phenomenon, called extraordinary optical transmission [10, 11, 12, 13] is known to preserve polarization entanglement under certain geometric conditions [14, 15].

In this letter we present evidence that energy-time entanglement also survives this photon-plasmon-photon conversion with photons at telecom wavelength. To this

end we measure the strength of non-local quantum correlations involving photons from entangled pairs, using a Franson-type interferometric experiment [16]. We measured it in the case that both photons go directly to the interferometers, and in the case that one member of the entangled pair undergoes a plasmon conversion before reaching its interferometer. The strength of the quantum correlation is quantified by means of the visibility of interferences fringes, recorded in both cases. We show that no visibility reduction is observed and thus that entanglement is preserved.

The experimental setup is made of a photon pairs source, two U-benches allowing the two different perforated gold film samples to be inserted and removed in the paths of the photons, and two interferometers (see figure 1). The photon pairs are created inside a KNbO_3 non-

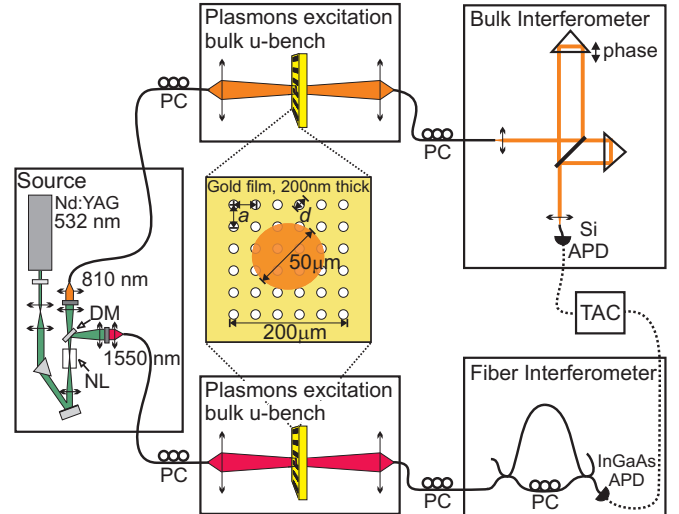


FIG. 1: Schematic of the experimental setup. NL: non-linear crystal; DM: dichroic mirror; PC: polarization controller; a : lattice periodicity, d : hole diameters (see text).

linear crystal pumped with a 532 nm NdYaG continuous laser (coherence length > 1 km) in a type I spontaneous parametric down conversion (SPDC) configuration. One

member of the pair has its central wavelength around 810 nm with a spectral width of about 2 nm while the other is centered around 1550 nm with a spectral width of 7 nm. These values correspond to coherence times of 1.1 ps and coherence lengths of 0.34 mm. Adjusting the phase matching by tilting the crystal, it is possible to tune slightly these central wavelengths. The SPDC generated photons are collected into two single mode fibers by mean of a dichroic mirror and two coupling lenses and sent to the U-benches. As this source produces photons at two well separated wavelengths, the properties of two different gold subwavelength nanostructures are investigated successively. One is designed to match the 810 nm photons the other the 1550 nm photons. The photons that undergo the plasmonic conversion are either the 810 nm one or the 1550 nm ones.

The U-benches are made of two lenses. The first focuses the light at the output of the first single mode fiber into a beam with a $50\text{ }\mu\text{m}$ beam diameter situated a few centimeters away from the lens. The second lens couples back this beam inside another single mode fiber that is finally connected to an interferometer. Perforated gold film samples can be hold at the beam waist position perpendicularly to the beam optical axis, by an orientable mount. Without samples, the U-benches feature about 3 dB insertion losses, without measurable spectral or polarization dependency. When a sample is inserted into the photon beam, no corrections are made to the lense's alignment. The light that is collected back into the fiber is therefore the light which is re-emitted in the same spatial mode than in the case where no sample is inside the beam. Control of the incident polarization state is made using the fiber polarization controller in front of the U-benches. However, as expected in this particular square hole array configuration for which one can assume that photons arrive perpendicularly to the sample (less than 1 degree of angular spreading), the polarization dependency of the transmittance T_λ at the operating wavelength λ was observed to be less than 2 dB. The other polarization controllers are used to control the polarization at the input of both interferometers and inside the fiber interferometer in order to maximize the optical visibility.

The output of the U-benches are connected to unbalanced Mach-Zender interferometers, with 1 m optical path length difference between the two arms (this correspond to a time difference of 3.3 ns). The one that is designed for the 810 nm photons is made out of bulk optics, while the other is made out of fibers. Both interferometers are passively stabilized by means of temperature regulation. 810 nm photons are detected at one output of the bulk interferometer using an actively quenched silicon APD photon counter (EG&G). The 1550 nm photons are detected at one output of the fiber interferometer using one InGaAs APD photon counter (idQuantique), gated with the signal of the silicon counter. The width of the

gate applied on the the InGaAs APS is about 2.5 ns. The dark counts of this detector is about 3.5×10^{-5} counts per gate. The dark counts of the Si APD is negligible. More details about this source and the interferometers can be found in [17, 18].

Photons independently travel through the long arm and short arms of their respective interferometers, and the time differences between the detections of both photons are measured using a time to analog converter (TAC). Photons have a 50% probability of both choosing the long arms or both the short arms of their respective interferometers. In both these cases, the time difference between the two detections is about zero. Since the coherence of the pump laser is much larger than the interferometers's imbalance, it is impossible to know which paths they have chosen. These events are thus undistinguishable. This leads to quantum interferences that correlate the chosen output port for both photons. These quantum correlations are functions of the sum of the phases applied inside the interferometers and reflect the energy-time entanglement of the photon pairs. By using a time window discriminator it is possible to isolate these interfering events from the non-interfering ones (i.e. photons choosing different arms) as the latter happen at different times. In this experiment the sum of the phases is adjusted by tuning the length of the long arm of the bulk interferometer using a piezo-electric actuator. The visibility of the interference fringes is a direct indication of the strength of the quantum correlation due to the energy-time entanglement, and thus can be used to verify that the energy-time entanglement is not destroyed by the photon-plasmon-photon conversion.

The two different perforated film samples were fabricated in 200 nm-thick evaporated gold films on 0.9 mm glass substrates. The gold was coated with a 200 nm-thick PMGI (polydimethyl glutarimide) electron-beam sensitive resist layer which was patterned using electron-beam lithography. Following exposure of the hole arrays, the resist was developed in tetraethylammonium hydroxide for 1 min. at 22°C and rinsed with de-ionized water. The structures were then transferred into the Au layer using Ar-sputtering for 14 min. with 200 W power. Finally, the PMGI residuals were removed using oxygen ashing. The arrays size is about $200 \times 200\text{ }\mu\text{m}^2$. The holes are circular and disposed following a regular square pattern. As the light beam area is only about 5% of the array area, the array can be considered as infinite, the boundary effects are thus negligible.

In our samples, the extraordinary optical transmission is mediated by SP mode lying at the metal-substrate interface and propagating along the square array diagonals. In order to determine the optimal periodicity a and hole diameter d for maximal transmittance enhancement (i.e. for optimal coupling of the SPs to the photon pair's members at the corresponding wavelengths) various simulations were performed employing a modal

expansion method in connection with surface impedance boundary conditions on the metal interfaces, and perfect metal boundary conditions in the hole walls [15]. Several hole arrays were fabricated, with slight changes around theoretical values and for a range of fabrication parameters. They were characterized for transmittance spectra, using classical light spectrometry. Results exhibit the typical shape of SPs extraordinary light transmission, featuring resonances due to SPs excitations (see figure 2). Only the spectra of the samples designed for the 1550 nm experiment are shown. To the best of our knowledge this transmittance spectrum for extraordinary light transmission around 1550 nm is the first reported so far. Spectra for the samples designed for the 810 nm have similar shapes. Verifications were made to confirm that the re-emitted light originates from photon-plasmon-photon conversions. First, the resonance position scales linearly with the array period whereas the peaks height and width depend on the hole diameter. Second, the SP band structure was recovered by changing the polarization and incident angle of the impinging photons. Results were very similar to the one usually found in literature on the subject [10, 11, 12, 14]. From these measurements, the most

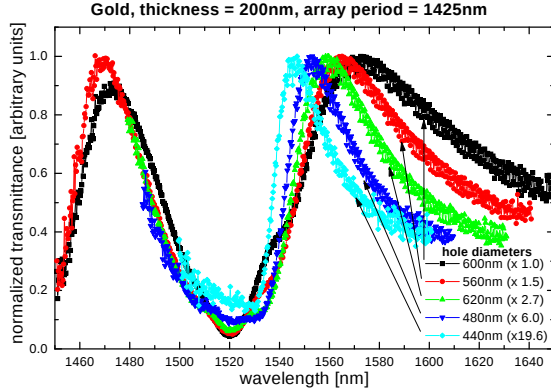


FIG. 2: Transmittance spectra of one of the hole array designed for transmission at 1550 nm. This shows the dependencies of the peaks width with the hole diameters. Peaks' heights are normalized by factors shown in the legend. The small fast oscillations correspond to Fabry-Perrot effects at the glass substrate interfaces.

suited arrays with respect to our experimental limitations were chosen for the entanglement experiment, one for the 810 nm and one for the 1550 nm photons. The exact operating wavelengths λ were chosen accordingly. Entanglement measurements for the two wavelengths were made separately. First, the source was tuned to produce photons at 820 nm and 1515 nm and a hole array with $a=700$ nm and $d=300$ nm was used. Secondly, the source was tuned to produce photons at 810 nm and 1550 nm and a hole array with $a=1400$ nm and $d=600$ nm was

used. Interferences fringes are recorded without samples inside the U-benches. The chosen sample is then inserted inside the U-bench, and its position is adjusted using red laser light. Interference fringes are then recorded again, and the ratio of the maximal count rate in both cases is verified to be compatible with the transmittance values previously measured with classical light (see table I). The resulting interferences fringes are shown on figure 4.

Using the same Franson-type experimental setup, we performed another kind of measurement. The gold hole array at 1550 nm is replaced by a long range surface plasmon polariton (LR-SPP) waveguide, provided by Micro Managed Photons A/S. This waveguide consists of a 0.5 cm long gold stripe, sandwiched between two layers of benzocyclobutene (BCB), a dielectric of refraction index $n = 1.535$, and deposited upon a silicon wafer. Note that the plasmon waveguide's length is much longer than the single photon coherence length, hence during a certain time the photons are entirely converted into plasmons. The gold stripe is $8\mu\text{m}$ wide and about 20 nm thick. Standard single mode fibers are approached as close as possible from the ends of a thin gold strip layer. The polarization mode is set to be linear and perpendicular to the surface sample by mean of a fiber polarization controller. SPP propagate along the gold stripe and re-emit light which is collected by another single mode fiber (see figure 3). This U-bench is connected in place of the 1550 nm bulk U-bench of figure 1, and interference fringes are recorded (see figure 4). More details about this gold stripe device and this particular plasmonic excitation procedure can be found in reference [19] and references therein.

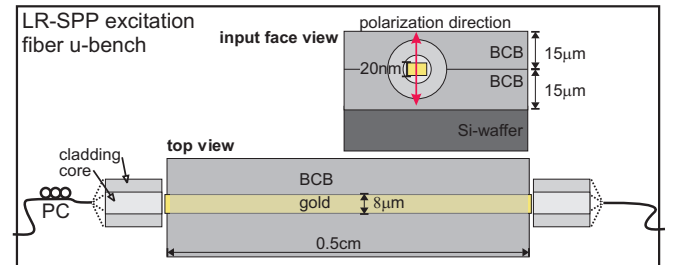


FIG. 3: Schematic of the fiber U-bench used to excite LR-SPP propagation through gold stripe waveguide.

The net visibilities of the interferences fringes are calculated by subtracting the noise level and fitting the data to a sinusoidal dependency. The noise level is the contribution of the InGaAs APD dark counts together with the double pair emission rate of the SPDC source. The table I show the obtained values (visibilities are dark-count subtracted net values). From these results, one can see that the strength of the quantum correlations and thus the entanglement is clearly preserved by the photon-plasmon-photon conversion, at the two working wave-

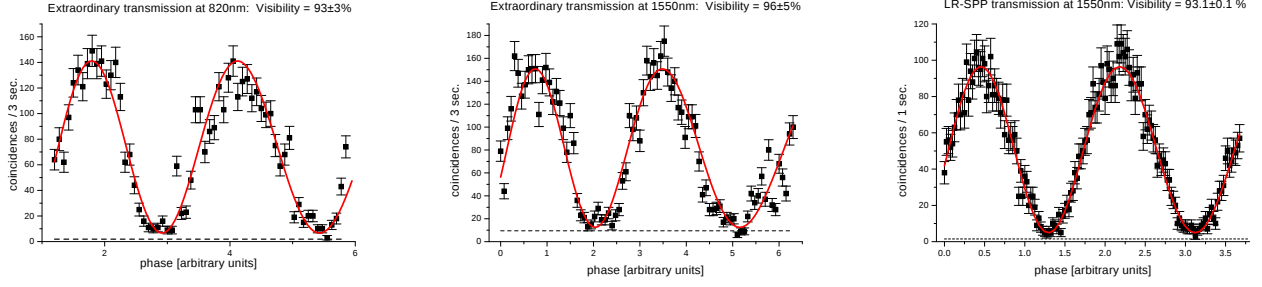


FIG. 4: Interference fringes with gold film samples and LR-SPP waveguide in the path of the photons. The dashed horizontal line is the noise level. The displayed visibilities are net value.

TABLE I: Experimental results

Experiment	Reference visibility	Plasmon-assisted visibility	Transmittance
extraordinary transmission at 810 nm	$93 \pm 3\%$	$93 \pm 3\%$	11%
extraordinary transmission at 1550 nm	$97 \pm 3\%$	$96 \pm 5\%$	6%
LR-SPP transmission at 1550 nm	$93.1 \pm 0.1\%$	$93.2 \pm 0.1\%$	20%

lengths. No relevant two-photons interference visibility reductions occur when a sample is inserted in the path of a photon beam. The only effect is the reduction of the coincidence count rate due to the partial transmittances resulting from extraordinary light transmission. Energy-time entanglement is thus proven to survives plasmon conversions at telecom wavelengths. The preservation of this kind of entanglement implies that SPs are coherently created by photons being in a superposition of two different incoming times, separated by several nanoseconds, while the SPs lifetime in our experiment should be much less than picoseconds (the time for light to travel through the sample thickness). Therefore the only SP quantum state compatible with the above results is a superposition of a single SP existing at two different moment in time separated one from the other by a duration thousand times longer than the its own lifetime. At a macroscopic level this would lead to a "Schrödinger cat" living at two epochs that differ by much more than a cat's lifetime. The plasmons of the present experiment involve a mesoscopic number of electrons of about 10^{10} . It should however be stressed that these do carry collectively only a single degree of freedom, i.e. a single qubit.

Apart from these fundamental considerations, our results show that energy-time entanglement can be efficiently coupled to SPs. As this kind of entanglement is robust for long distance quantum information transmission, future quantum SPs circuits could be integrated with long range optical quantum communication networks.

Micro Managed Photons (MMP) A/S (Denmark) is gratefully acknowledged for providing the gold stripe LR-SPP samples together with some data and expert advices.

Financial support by the Swiss NCCR Quantum Photonics is acknowledged.

* Electronic address: sylvain.fasel@physics.unige.ch

- [1] R. T. Thew, S. Tanzilli, Tittel, H. Zbinden and N. Gisin, Phys. Rev. A **66**, 062304 (2002)
- [2] N. Gisin, G. Ribordy, W. Tittel, and H. Zbinden, Rev. Mod. Phys. **74**, 145 (2002)
- [3] C. H. Bennett, G. Brassard, C. Crépeau, R. Jozsa, A. Peres, and W. K. Wootters, Phys. Rev. Lett. **70**, 1895 (1993)
- [4] C. Monroe, Nature **416**, 238 (2002)
- [5] K. Hammerer, K. Molmer, E.S. Polzik, J.I. Cirac, quant-ph/0312156
- [6] M. D. Barrett et al., Nature **429**, 737 (2004)
- [7] J. Sherson, B. Julsgaard, E. S. Polzik, quant-ph/0408146
- [8] W. L. Barnes, A. Dereux, and T. W. Ebbesen, Nature **424**, 824 (2003)
- [9] H. A. Bethe, Phys. Rev. **66**, 163 (1944)
- [10] T. W. Ebbesen et al., Nature **391**, 667 (1998)
- [11] H. F. Ghaemi, T. Thio, D. E. Grupp, T. W. Ebbesen, and H. J. Lezec, Phys. Rev. B **58**, 6779 (1998)
- [12] D. E. Grupp, H. J. Lezec, T. W. Ebbesen, K. M. Pellerin, and T. Thio, Appl. Phys. Lett. **77**, 1569 (2000)
- [13] L. Martín-Moreno et al., Phys. Rev. Lett. **86**, 1114 (2001)
- [14] E. Altewischer et al., Nature **418**, 304 (2002)
- [15] E. Moreno, F. J. García-Vidal, D. Erni, J. I. Cirac, and L. Martín-Moreno, Phys. Rev. Lett. **92**, 236801 (2004)
- [16] J. D. Franson, Phys. Rev. Lett. **62**, 2205 (1989)
- [17] G. Ribordy, J. Brendel, J.-D. Gautier, N. Gisin, and H. Zbinden, Phys. Rev. A **63**, 012309 (2000)
- [18] S. Fasel, G. Ribordy, H. Zbinden and N. Gisin, Eur. Phys. J. D **30**, 143 (2004)
- [19] T. Nikolajsen, K. Leosson, I. Salakhutdinov, and S. I

Bozhevolnyi, Appl. Phys. Lett. **82**, 668 (2003)